




**ACTIVE SOLUTIONS BETWEEN
INDUSTRY AND AMBIENCE**

MODEL: DUST TABLE

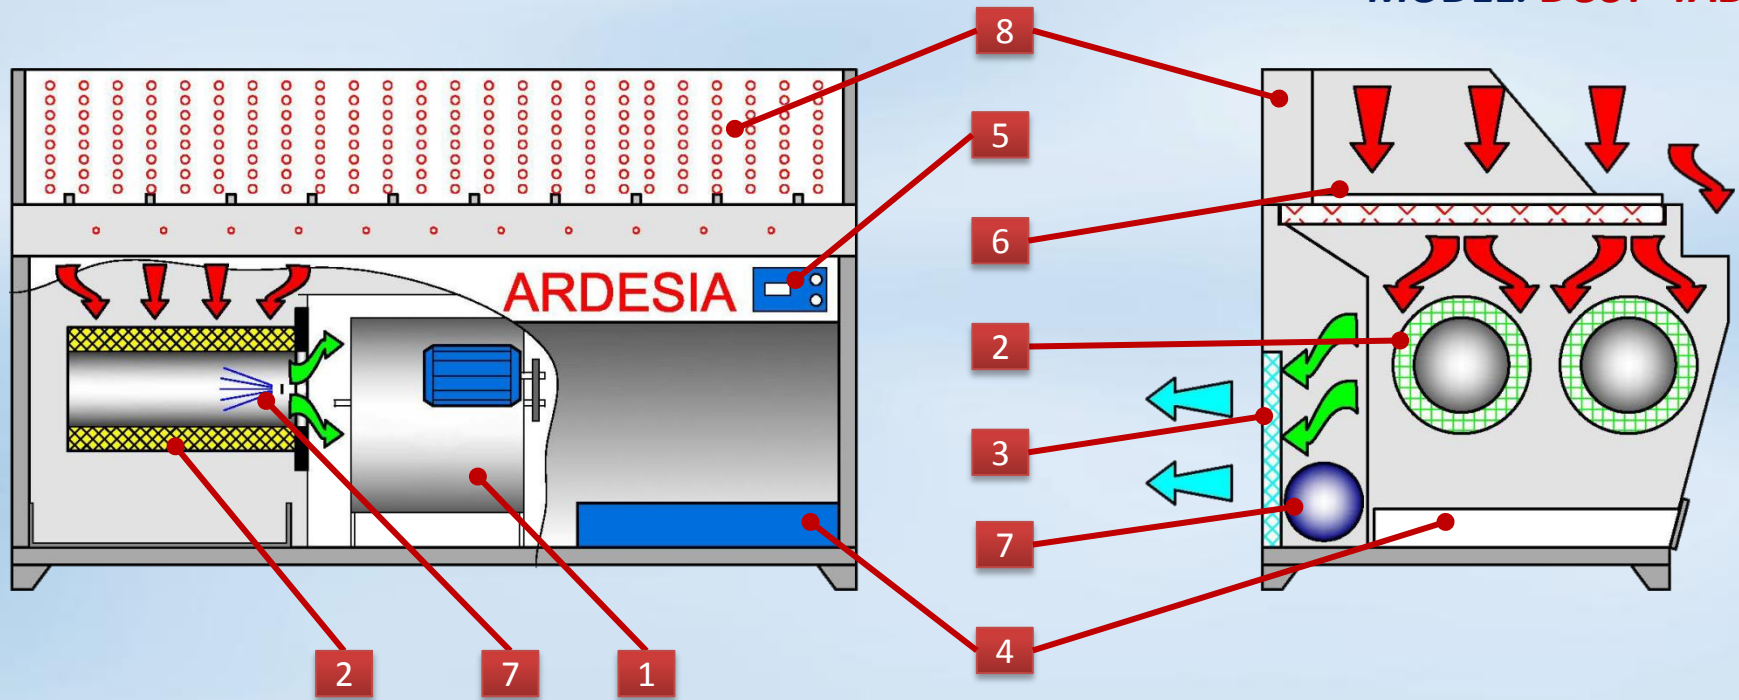




DESCRIPTION:

This type of bench is indicated for the suctioning and removal of dust from sanding. It is built with galvanized press-folded sheet iron. The main feature of this bench is the filtration of dust through aluminized polyester antistatic cartridges. The bench is equipped with a cleaning system of the cartridges with jets of compressed air. The dust is deposited in 2 removable trays. The outgoing air is further filtered through acrylic fiber cells.

EQUIPMENT:

1. Centrifugal electrical fan
2. Aluminized polyester cartridges
3. Cells with acrylic filter output
4. Dust collecting drawers
5. Electrical panel IP55
6. Scratchproof fillets
7. Cleaning system of filter with compressed air
8. Suctioning panel wall (option)

MODEL: DUST TABLE

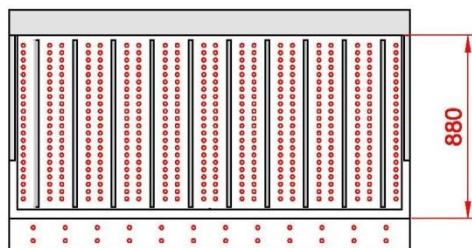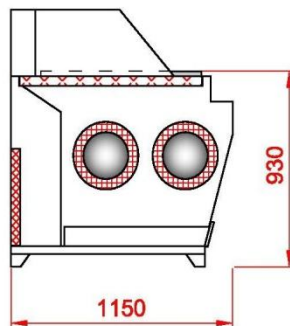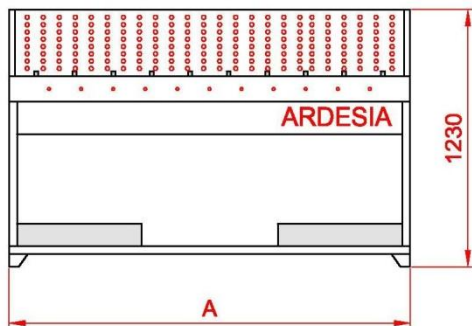

Modello	A Lunghezza mm	Quantità cartucce	Dimensioni cartucce, mm	Superficie filtrante, m ² (in cartucce)	Potenza elettro aspiratore kW	Portata aria nominale m ³ / ora
DUST TABLE -E-2	2000	2	Ø330 / L600	19,6	1,5	3900
DUST TABLE-E-2.5	2500	2	Ø330 / L700	22,9	1,5	4300
DUST TABLE -E-3	3000	2	Ø330 / L1000	32,6	2,2	5400

DUST TABLE - 2	2000	4	Ø330 / L600	39,2	1,5	4300
DUST TABLE - 2.5	2500	4	Ø330 / L700	45,8	2,2	5400
DUST TABLE - 3	3000	4	Ø330 / L1000	65,3	2,2	6500

